


AD-A096 257 ARMY COMMUNICATIONS RESEARCH AND DEVELOPMENT COMMAND --ETC F/G 20/14  
DIFFRACTION OF MILLIMETER WAVE COMMUNICATION SIGNALS INTO SHADO--ETC(U)  
FEB 81 N ROKKOS, R A JOHNSON  
UNCLASSIFIED CORADCOM-81-1 NL

END

DATE

4 1981

DTIC



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A



**LEVEL II**

(12)

RESEARCH AND DEVELOPMENT TECHNICAL REPORT  
CORADCOM-81-1

AD A 096257

DIFFRACTION OF MILLIMETER WAVE COMMUNICATION  
SIGNALS INTO SHADOW REGIONS

DTIC  
ELECTE  
S MAR 12 1981 D

E

N. ROKKOS  
R. A. JOHNSON  
CENTER FOR COMMUNICATIONS SYSTEMS

FEBRUARY 1981

DISTRIBUTION STATEMENT  
Approved for public release;  
distribution unlimited.

**CORADCOM**

U S ARMY COMMUNICATIONS RESEARCH & DEVELOPMENT COMMAND  
FORT MONMOUTH, NEW JERSEY 07703

FILE COPY  
DAG

87 3 11 378

## **NOTICES**

### **Disclaimers**

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

### **Disposition**

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 141 CORADCOM-81-1 ✓	2. GOVT ACCESSION NO. AD-A096257	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Diffraction of Millimeter Wave Communication Signals into Shadow Regions		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) N. Rokkos R. A. Johnson		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS CENCOMS DRDCO-COM-FM-4 Fort Monmouth, NJ 07703		8. CONTRACT OR GRANT NUMBER(s) 1218
11. CONTROLLING OFFICE NAME AND ADDRESS Multichannel Transmission Division U.S. Army CORADCOM, CENCOMS Fort Monmouth, NJ 07703		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 111 611182.H48.M2.11.01
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE February 1981
		13. NUMBER OF PAGES
		15. SECURITY CLASS. (of this report) Unclassified
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Millimeter Wave Communications; Edge Diffraction		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A study was conducted to determine the order of magnitude of edge diffraction effects at mm-wavelengths. Theoretical and experimental results were found to be in good agreement; both show, however, that the shadow boundary of mm-waves is well defined and that distances by which a mm-wave receiver may be moved into the shadow zone are limited.		

DD FORM 1 JAN 73 1073

EDITION OF 1 NOV 65 IS OBSOLETE


UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

410489

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

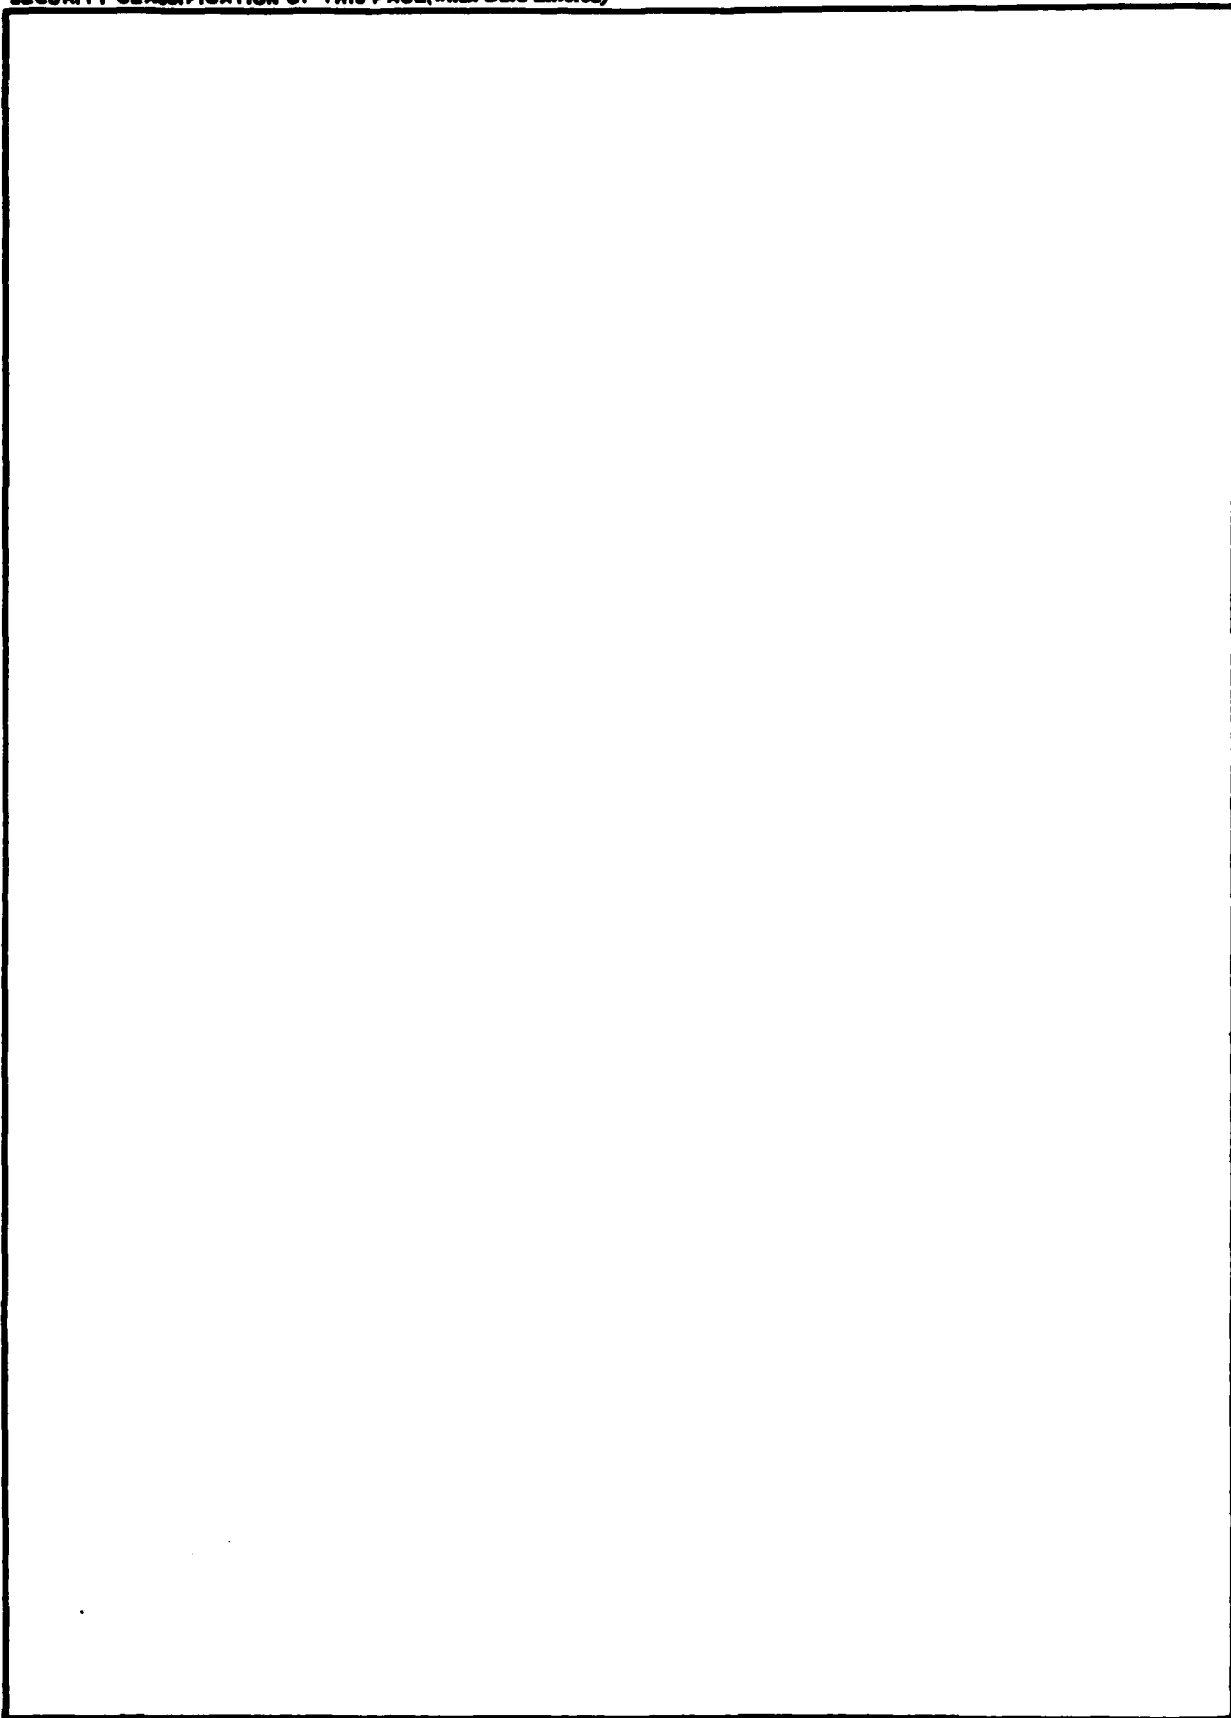

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## Table of Contents

	Page
1. Introduction	1
2. Theory	1
3. Experimental Results	6
4. Conclusions	14

## Figures

1. Geometry of Diffraction Problem	2
2. Edge-Diffraction Coefficient Q vs. Normalized Distance	3
3. Depth Into Geometrical Shadow-Zone For Given Attenuation Q	5
4. Transmission Into Shadow Region: Tactical Example (Tank With MM- Wave Radio)	7
5. Test Sites and Geometry of Experiments	8
6. Signal Attenuation (db) vs. Distance (Meters) From Corner of Hexagon Building	9
7. Signal Attenuation (db) vs. Distance (Meters) From Corner of Hexagon Building	10
8. Signal Attenuation (db) vs. Distance (Meters) From Building 1204 at Fort Monmouth	11
9. Signal Attenuation (db) vs. Distance (Meters) From Small Hill at Wayside Test Area	12
10. Signal Attenuation (db) vs. Distance (Meters) From Small Hill at Wayside Test Area	13

<b>Accession For</b>	
12	NTIS GRA&I <input checked="" type="checkbox"/> DTIC TAB <input type="checkbox"/> Unannounced <input type="checkbox"/> Justification
<b>By</b>	
<b>Distribution/</b>	
<b>Availability Codes</b>	
<b>Dist</b>	<b>Avail and/or Special</b>
A	

## 1. INTRODUCTION:

It is well known that millimeter wave (mm-wave) links require unobstructed line-of-sight transmission paths. However, if a mm-wave beam hits the corner of a building, or skims over the top of a small hill, edge diffraction will scatter a certain amount of power into the geometrical shadow region. Hence, in principle, mm-wave transmission into shadow zones is possible. This may be used to advantage for camouflage purposes or when line-of-sight transmission is blocked by a large obstacle.

A study was conducted to determine the order of magnitude of edge diffraction effects at mm-wavelength. Theoretical and experimental results were found to be in good agreement; both show however that the shadow boundary of mm-waves is well defined, and that distances by which a mm-wave receiver may be moved into the shadow zone are limited.

## 2. THEORY:

The theory of knife edge diffraction is well understood; see for example Ref (1). Fig. 1 shows the geometry of the problem. The knife edge (perpendicular to the plane of the paper) is the top of the obstruction, which is assumed to be opaque to electromagnetic waves.

The power received by an antenna placed in the space range behind the obstruction will be modified by a factor

$$Q = \left| \frac{1}{2} (1 + F(u)) \right|^2 \quad (1)$$

when compared to the power received via an unobstructed path of the same length  $d_1 + d_2$ . Here

$$F(u) = C(u) + iS(u) = \int_0^u e^{i\frac{\pi}{2}t^2} dt$$

is the complex Fresnel integral and  $u$  is the (normalized) distance measured from the geometrical shadow boundary:

$$u = \left( \frac{kd_1}{\pi(d_1 + z)z} \right)^{\frac{1}{2}} y \quad (2)$$

$u$  is counted positive in the illuminated region and negative in the shadow zone.  $k = 2\pi/\lambda$  is the wavenumber. The assumption  $|y| \ll d_2$ , which is implied in eqs. (1) and (2), is well satisfied in practical cases. Fig. 2



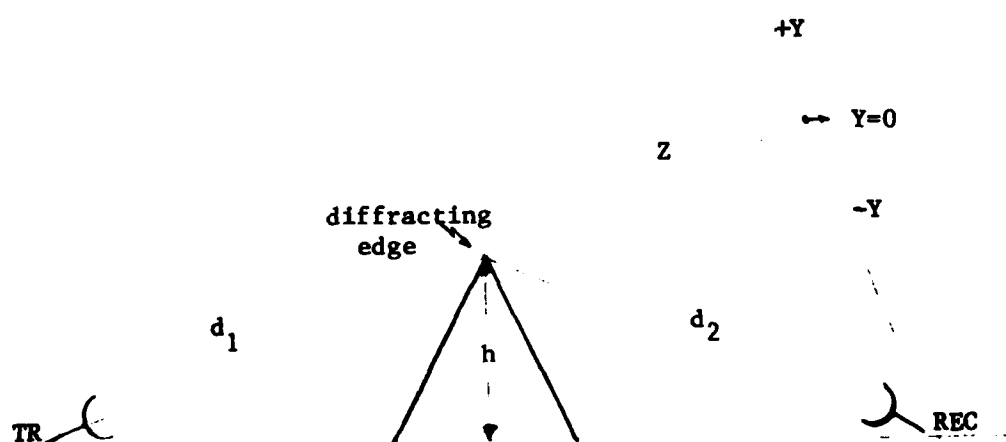


Fig. 1 - Geometry of Diffraction Problem.

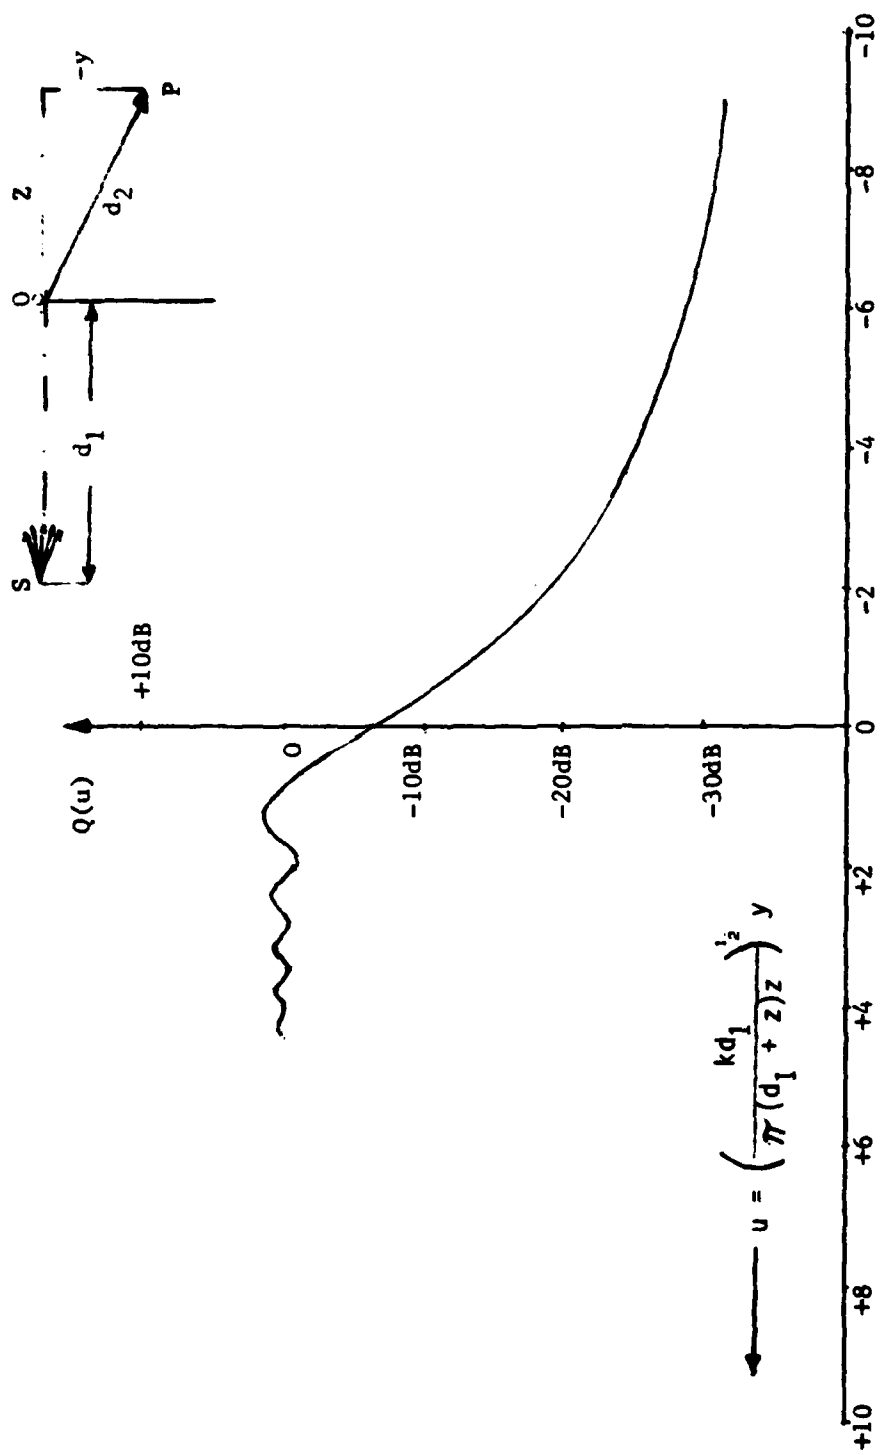


Fig. 2 - Edge-Diffraction Coefficient  $Q$  vs. Normalized Distance  $u$

shows a plot of  $Q$  vs.  $u$ .

When the receiving antenna is located in the illuminated region, line-of-sight conditions are maintained, and edge diffraction effects have very little influence on received power; we have  $Q \approx 1$  for  $u > 0$ . It is very interesting to note, however, that at certain distances (e.g.  $u = 1.25$ ) - edge diffraction may actually increase signal levels, though such increases remain small. At  $u = y = 0$ , i.e. where the line-of-sight just skims over the edge, and the lower half of the incident beam is "cut-off", the received signal level is reduced by 6 dB. For negative  $u$ , as the receiving antenna is moved into the geometrical shadow region, the signal level decreases rapidly.

The attenuation factor  $Q$  is in good approximation independent of the nature of the edge, whether it is sharp or rounded, metallic or dielectric. As long as the obstruction remains opaque, these characteristics are of secondary importance only.

Figure 3 answers the question to which depth  $-y$  the receiving antenna can be moved into the shadow zone if a given attenuation  $Q$  (10dB, 20dB, 30dB) is acceptable. This depth, of course, increases with radial distance  $d_2$  from the edge, but even at a distance of 1 km remains comparatively small, in the order of 1 to 10 m. Table 1 lists typical values taken from Fig. 3. It is seen that the shadow boundary at mm-wavelength is well defined and narrow.

Substantially larger values for  $|y|$  should become possible if an attenuation of 40dB or 50dB is permissible. Fig. 2 shows that the curve for  $Q$  vs.  $u$  "flattens out" substantially in this range. However, at this level of attenuation, second order effects caused by shape, conductivity, etc. of the obstruction should become noticeable or dominant so that Fig. 2 is not expected to yield reliable results.

**TABLE 1:** Depth  $|y|$  by which receiving antenna can be moved into geometrical shadow zone for given attenuation  $Q$ . ( $d_1 = 100\text{m}$ ,  $f = 60 \text{ GHz}$ )

$Q$	$ y $	$ y $
	$z=100\text{m}$	$z=1000\text{m}$
10dB	0.35m	2.5m
20dB	1.6m	11.8m
30dB	5.0m	37.3m

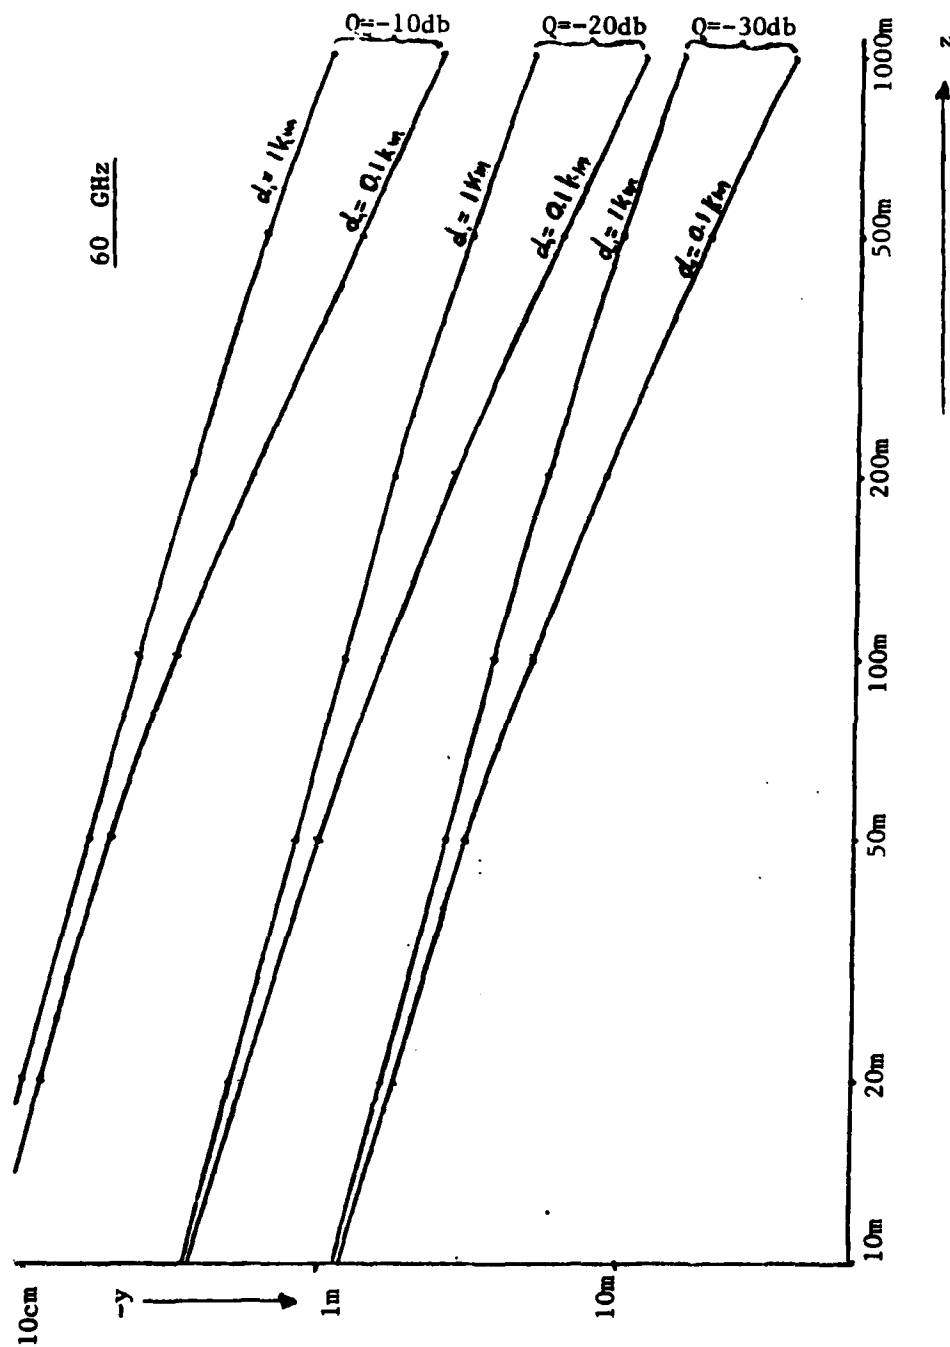


Fig. 3 - Depth into a geometrical shadow-zone for Given Attenuation  $Q$

As indicated, Fig. 3 applies to a frequency of 60 GHz. The figure remains valid at other frequencies provided the ordinate scale is appropriately modified. According to eq (2) we have  $|y| \sim k^{-1/2} \sim f^{1/2}$ . At 30 GHz, for example,  $|y|$  would be larger by a factor  $\sqrt{2}$ .

Fig. 4 applies the theory to a tactical example: A tank with a 60 GHz mm-wave radio is transmitting near the corner of a building. The input power of the radio is assumed to be at a level where reliable communication with an identical second radio can be established over distances of up to 1.5km under LOS conditions. The figure shows the depth to which the second radio at any given distance  $d_2$  from the edge can be moved into the shadow zone while maintaining reliable communication i.e. a received power level equal to the LOS level at 1.5km. In the range where  $d_2$  is much smaller than 1.5km (as assumed in the figure), the depth  $|y|$  is limited to a few meters only but increases with radial distance from the edge. When  $d_2$  approaches 1.5km, the trend reverses since the power margin which permits placing the radio in the shadow region decreases with distance from the transmitter.

### 3. EXPERIMENTAL RESULTS:

Experiments were conducted at 38 GHz and 60 GHz using available mm-wave radios developed at CENCOMS for voice/data transmission (contractor: Norden). Attenuation levels were measured by reading the AGC voltage displayed on those radios and using a calibration chart to determine the received power. The antennas of the radios have a directivity gain of 29dB at 38 GHz and 34dB at 60 GHz corresponding to a 3dB beamwidth of  $5.5^\circ$  and  $3^\circ$ , respectively. Distances from the edge were sufficiently large for far field experiments.

The tests were performed at three locations:

- (1) A corner of the Hexagon building was used as a vertical diffracting edge.
- (2) Similar measurements were made at building 1204 at Fort Monmouth.
- (3) A small hill at the Wayside test area was used to provide a rather gradual horizontal edge.

The geometry of the test sites is shown in Fig. 5.

Test results are plotted in Figs. 6 to 10. The two experimental curves in each figure were taken by alternation of the two radios as transmitter and receiver, respectively.

In the experimental curves, the point is indicated where the signal level was -6dB below the level measured in the illuminated region. The theoretical curves were plotted assuming that, at this point, the line-of-sight between the radios skimmed the diffracting edge.



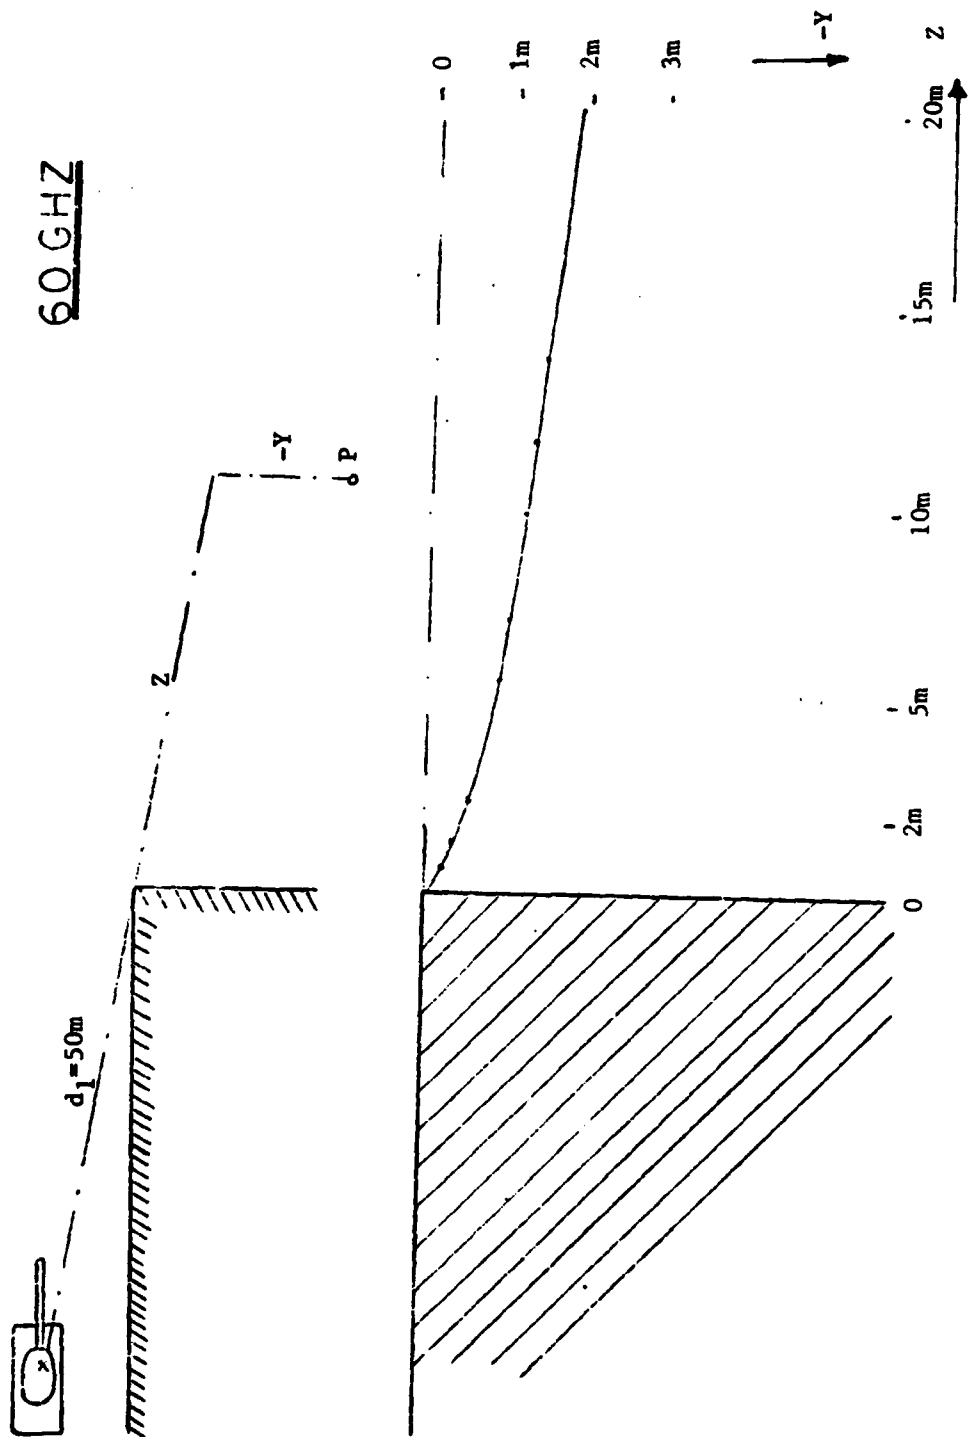



Fig. 4 - Transmission Into Shadow Region: Tactical Example (tank with mm-wave radio).

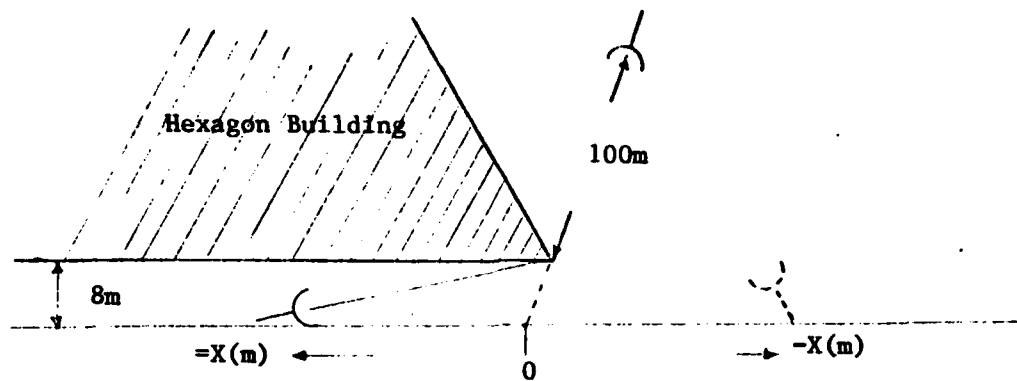

(a) Hexagon (Bldg 2700)

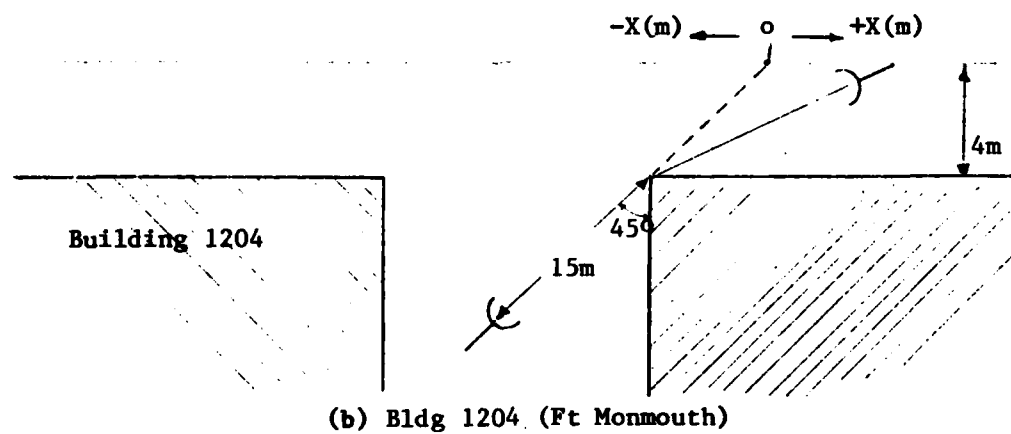

(b) Bldg 1204 (Ft Monmouth)

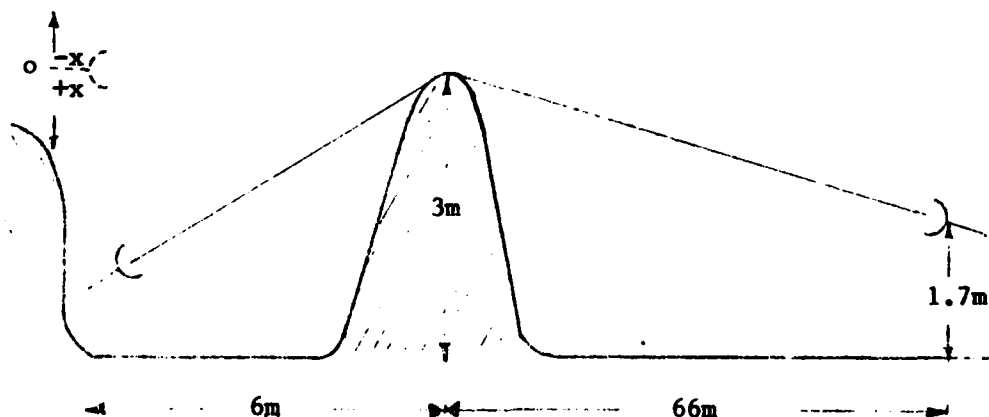

(c) Wayside Test Area. (Small Hill)

Fig. 5 - Test sites and geometry of experiments.

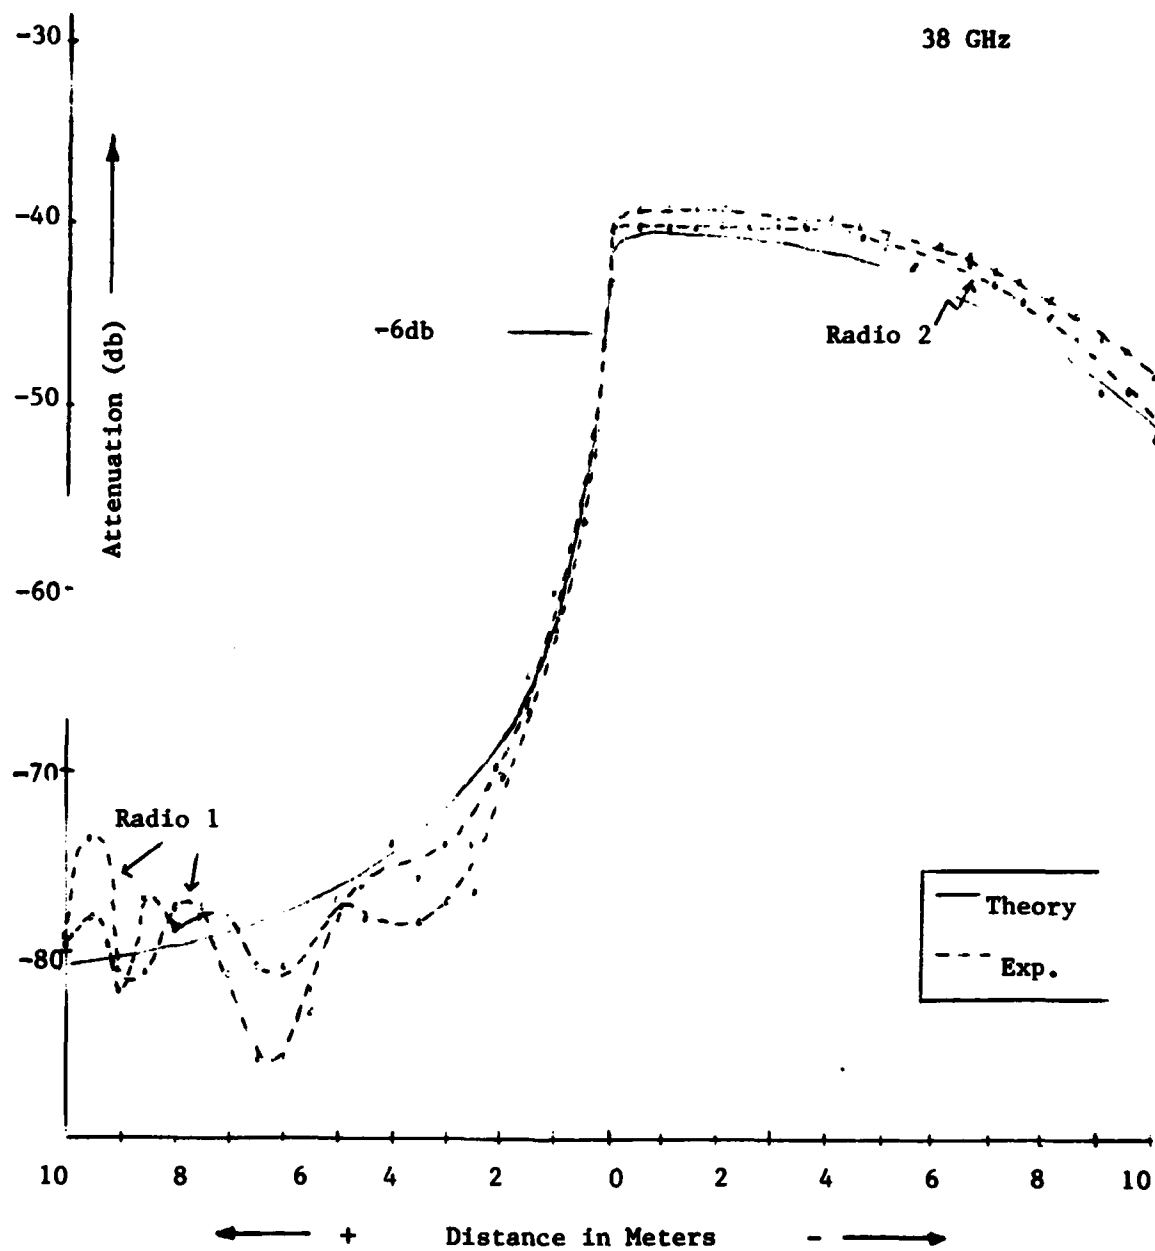


Fig. 6 - Signal attenuation (db) vs. distance (meters) from corner of Hexagon building (see Fig. 5a).



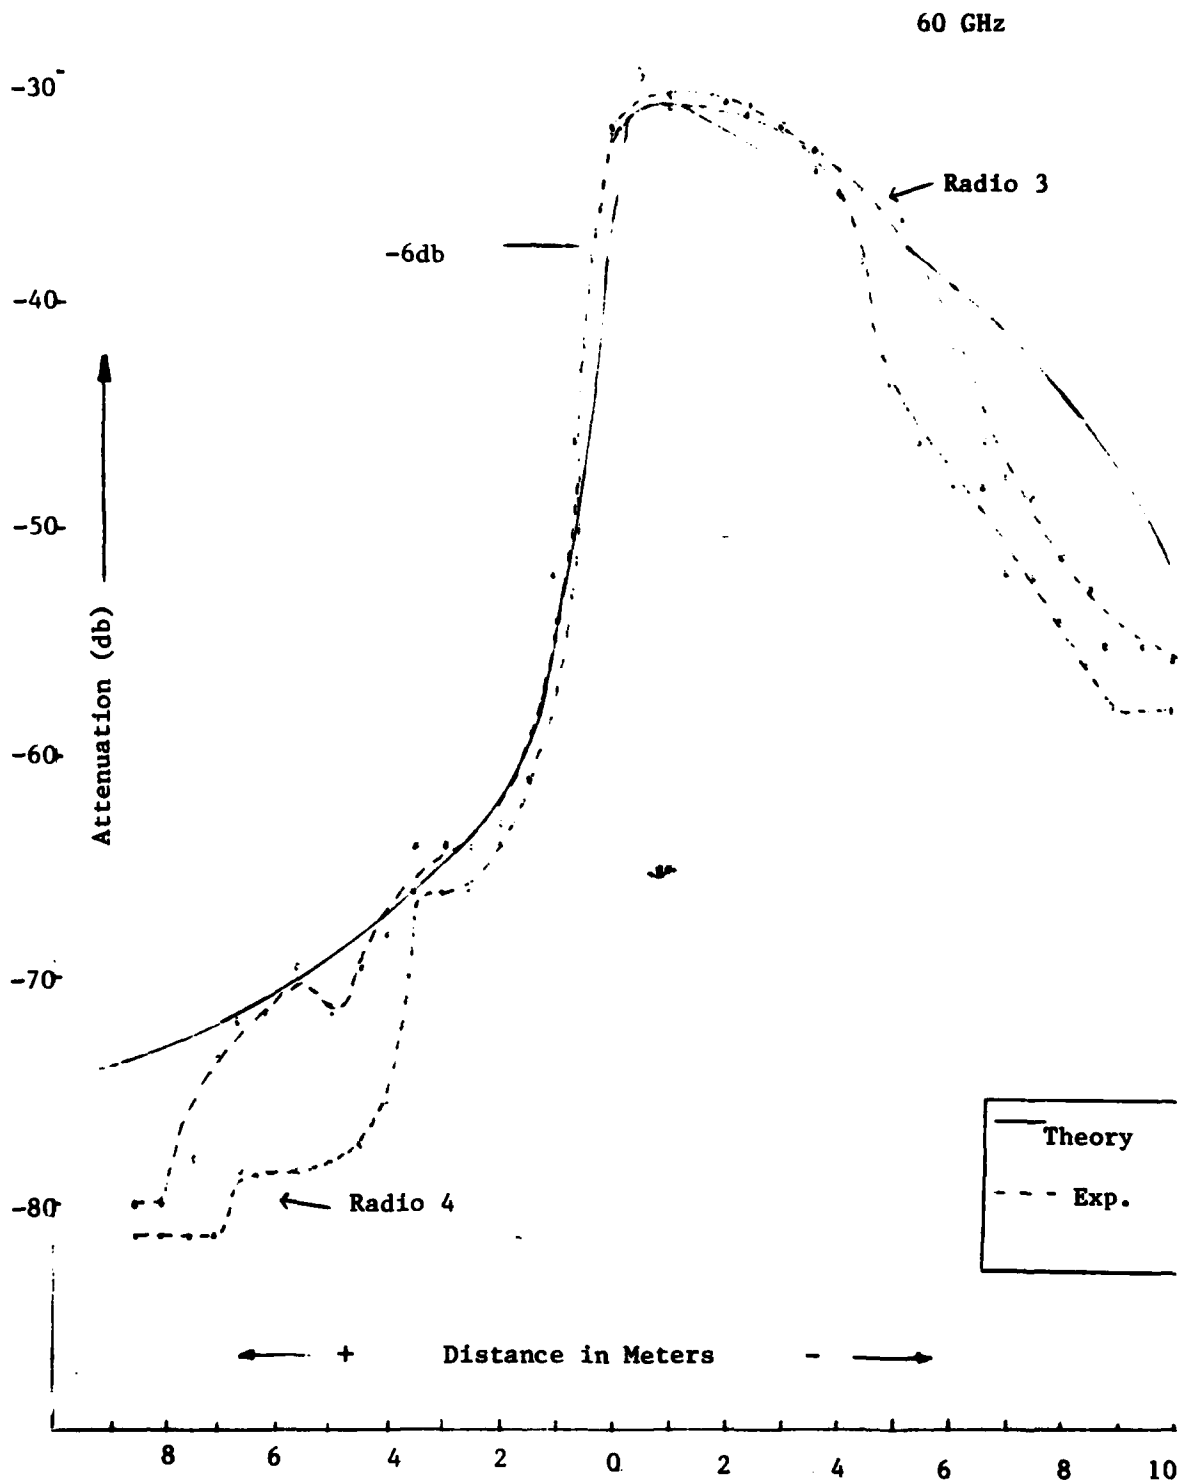


Fig. 7-Signal attenuation (db) vs. distance (meters) from corner of Hexagon Building (see Fig. 5a).

38 GHz

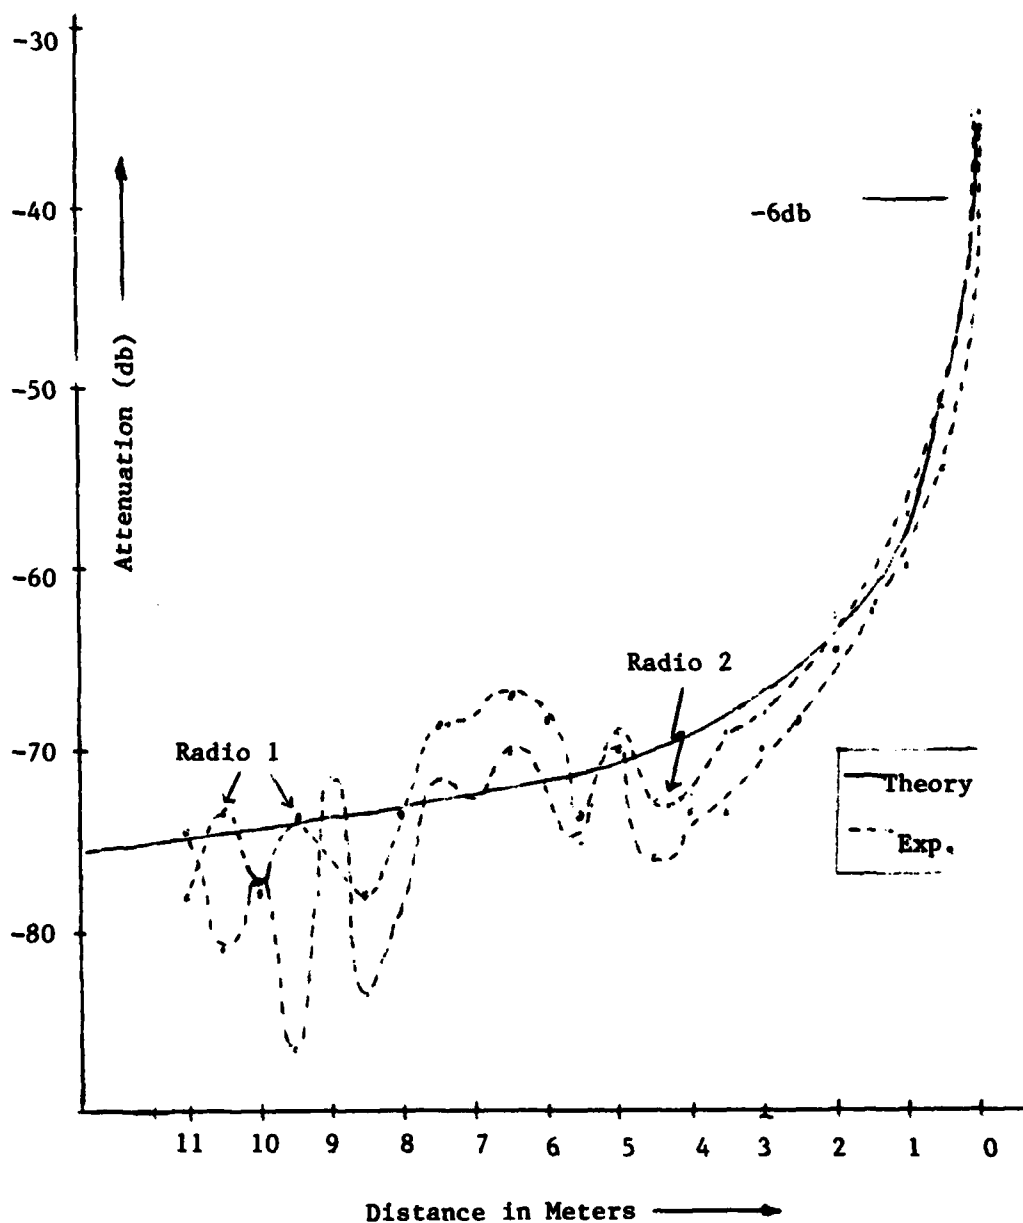


Fig. 8 - Signal attenuation (db) vs. distance (meters) from building 1204 at Fort Monmouth, (see Fig. 5b)

# Cliff at Wayside

38 GHz

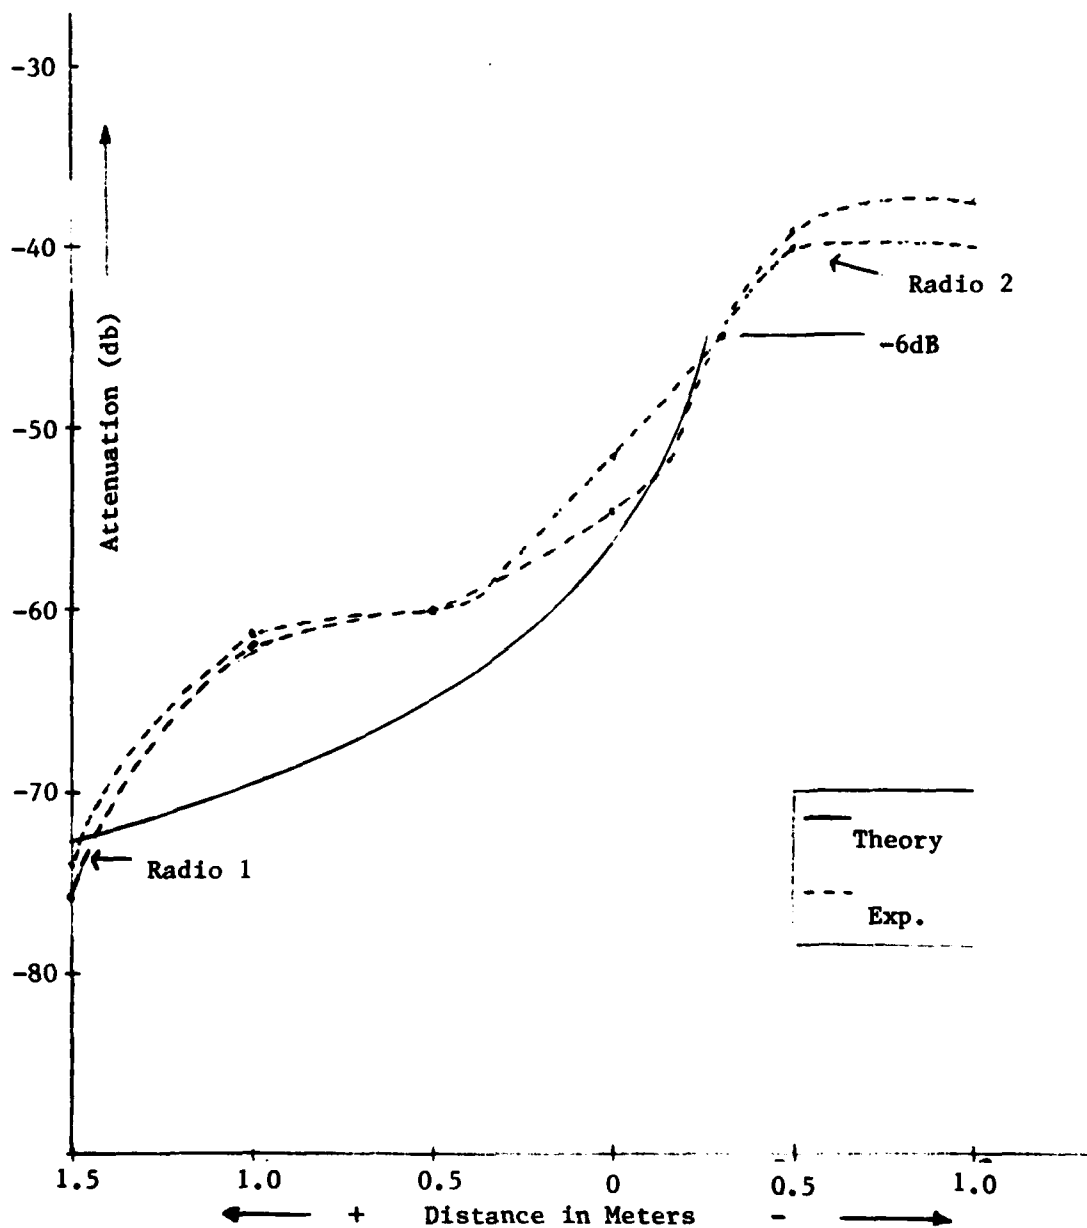


Fig. 9 - Signal attenuation (db) vs. distance (meters) from small hill at Wayside Test Area (see Fig. 5c)

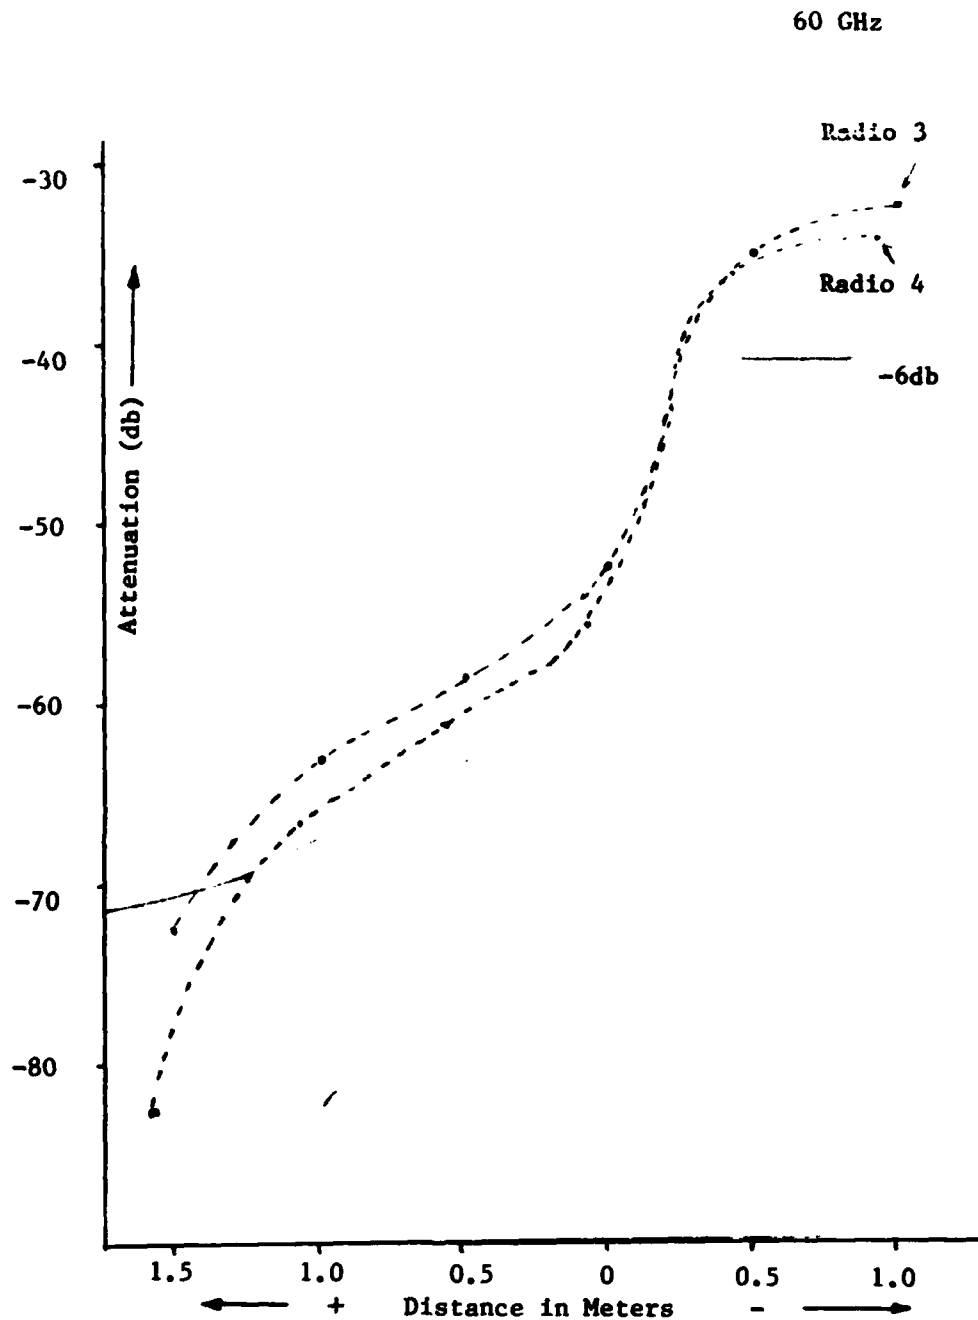


Fig. 10 - Signal attenuation (db) vs. distance (meters) from small hill at the Wayside Test Area, (see Fig. 5c)

It is seen that, in general, the experimental results are in very good agreement with theory. A notable exception is the 38 GHz data taken at Wayside (Fig. 10) where a small, rather undefined hill was the intervening object.

#### 4. CONCLUSIONS:

a. Agreement between theory and experiments is good. Edge diffraction effects can be estimated realistically from theory.

b. The shadow boundary at mm-wavelength is well defined and narrow; the depth to which a receiving antenna can be moved into the geometrical shadow zone of an obstruction is limited. If signal attenuation due to shadow effects is restricted to 30dB, this depth is in the order of a few meters or a few tens of meters depending on frequency and radial distance from the edge of the obstruction.

c. In general, radio communications at millimeter wavelengths cannot be expected to provide coverage into areas much beyond the line-of-sight. However, in short range applications, there is a shallow shadow zone where non-line-of-sight camouflaged type communications can be maintained.

#### ACKNOWLEDGEMENT

The authors wish to express their sincere appreciation to Dr. Schwering for providing the theoretical analysis for this report.

#### Reference:

(1) K. Bullington, "Radio Propagation Fundamentals", Bell Systems Technical Journal, Vol. 36, No. 3, 1957.

HISA-FM-306-81

